
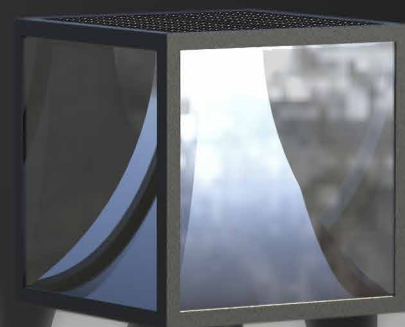


Cube Series

*Solar Powered LED
Architectural Lighting
Solutions*

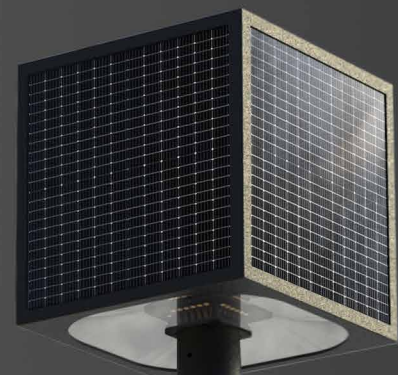

shineto

Cube-LED Solar Lights



ST-Cube-M



ST-Cube-L



ST-CubeMini-A




ST-CubeMini-B



ST-CubeMini-C

Solar Charge Controller

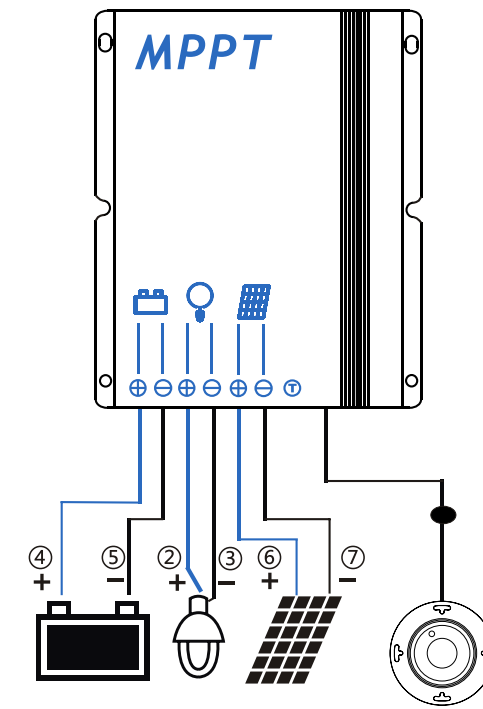

Innovative max power point tracking (MPPT) technology, tracking efficiency >99%



Automatic recognition of system voltage, 12V and 24V



Full digital technology, high charge & discharge conversion efficiency up to 96%



Motion detection for adapting dimming levels based on pedestrian needs



Precision constant current control supports from 50mA up to 3000mA



External temperature sensor



5 Step dimming can be programmed from 0% to 100% levels



IP67, Strong and durable aluminum case



Remote control operation



Full automatic electronic protection



Low voltage disconnect (LVD) and reconnect (LVR) settings in order to keep battery life healthy




Cube—LED Solar Lights

Cube Solar light is the use of solar panels to absorb sunlight, and then through the sealed battery storage energy, and finally through the crystal silicon solar cell to complete the power supply, very convenient use, because of the function of energy storage, so even if the continuous cloudy or rainy days, can keep the lamp normal use.

SHINETOO

Cube- LED Solar Lights

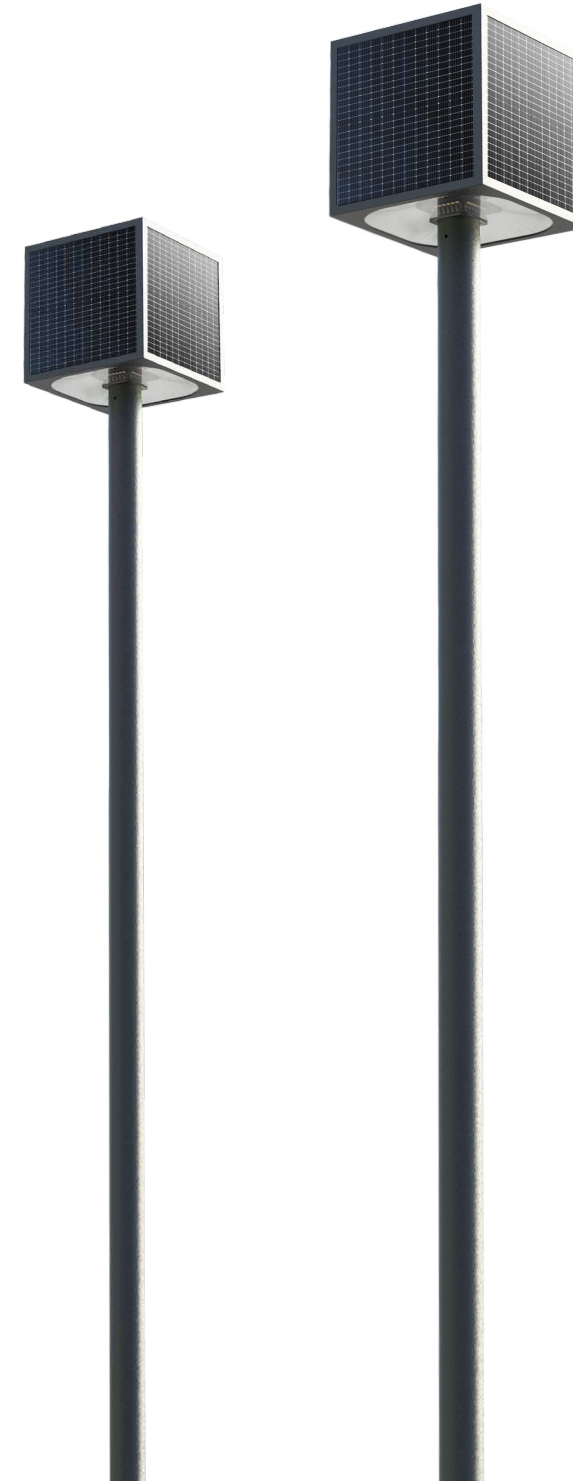

Finish Color Codes



SPECIFICATIONS



SPECIFICATION

Model Number ST-Cube-M
Height 2800mm

MATERIALS

Pole Material Aluminum 6063
Pole Color Black / Silver
IP&IK Protection IP65, IK08
Operating Temp -25°C ~ +45°C
Warranty 10 Years

LED LIGHT

LED Chips Philips
Power Consumption Factory Set 16W (1-16W adjustable at site)
Output 160LM/W
Light Distribution T5
Color 3000K / 4000K / 5000K
Runtime STD-4 Step dimming

BATTERY

Capacity 12.8V 24Ah LiFePo4
Cycles 3000

SOLAR MODULE

Watt Pmax 13W×5 Monocrystalline
Design life 25 Years

MOUNTING OPTIONS

Direct bury
Base plate mount



SPECIFICATION

Model Number ST-Cube-L
Height 3200mm

MATERIALS

Pole Material Aluminum 6063
Pole Color Black / Silver
IP&IK Protection IP65, IK08
Operating Temp -25°C ~ +45°C
Warranty 10 Years

LED LIGHT

LED Chips Philips
Power Consumption Factory Set 40W (1-40W adjustable at site)
Output 170LM/W
Light Distribution T5
Color 3000K / 4000K / 5000K
Runtime STD-4 Step dimming

BATTERY

Capacity 12.8V 42Ah LiFePo4
Cycles 3000


SOLAR MODULE

Watt Pmax 32W×5 Monocrystalline
Design life 25 Years


MOUNTING OPTIONS

Direct bury
Base plate mount

DIMENSIONS

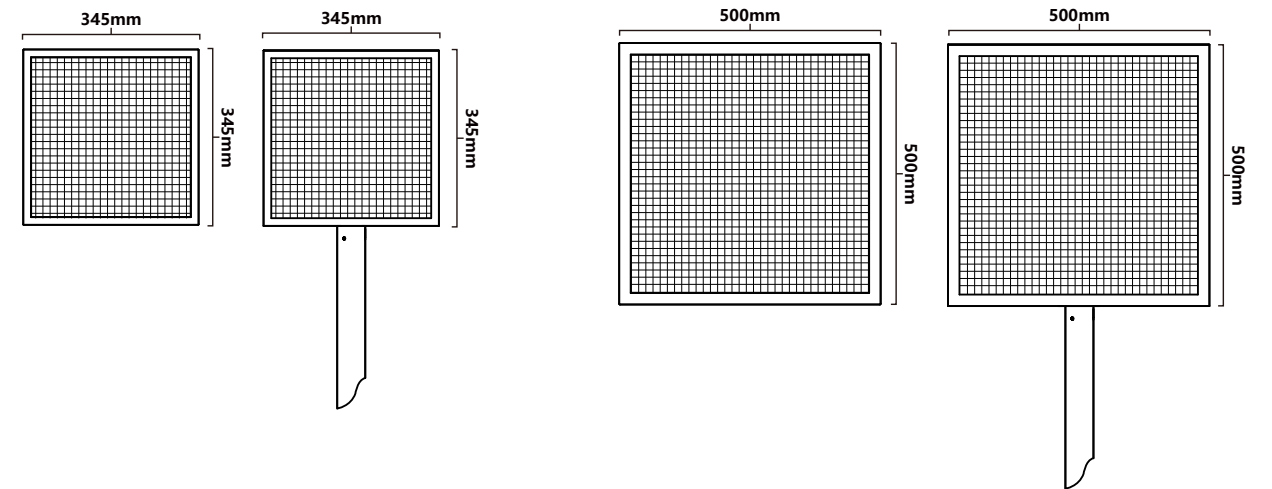

FACTORY SET SCHEDULE

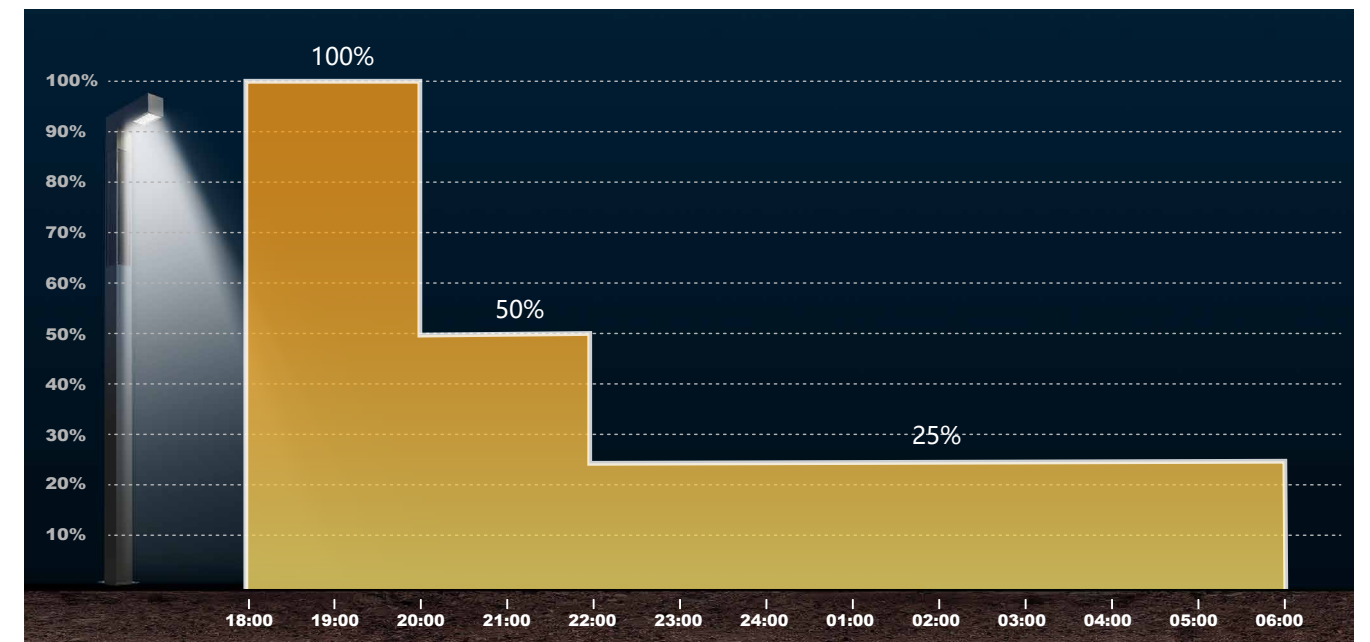

CubeMini LED Solar Bollard Lights

Cube Solar light is the use of solar panels to absorb sunlight, and then through the sealed battery storage energy, and finally through the crystal silicon solar cell to complete the power supply, very convenient use, because of the function of energy storage, so even if the continuous cloudy or rainy days, can keep the lamp normal use.



SHINETOO

CubeMini- LED Solar Bollard Lights



Finish Color Codes



SPECIFICATIONS



SPECIFICATION

Model Number ST-CubeMini-A
 Dimensions L: 190mm×W: 190mm×H: 635mm

MATERIALS

Pole Material Metal+PC+Glass
 Pole Color Black / Silver
 IP&IK Protection IP65, IK08
 Operating Temp -25°C ~ +45°C
 Warranty 10 Years

LED LIGHT

LED Chips Philips
 Power Consumption Factory Set 2W (1-2W adjustable at site)
 Output 160LM/W
 Light Distribution T5
 Color 3000K / 4000K / 5000K
 Runtime STD-4 Step dimming

BATTERY

Capacity 3.7V 15Ah LiFePo4
 Cycles 3000

SOLAR MODULE

Watt Pmax 6W Monocrystalline
 Design life 25 Years

MOUNTING OPTIONS

Direct bury
 Base plate mount



SPECIFICATION

Model Number ST-CubeMini-C
 Height L: 190mm×W: 247mm×H: 670mm

MATERIALS

Pole Material Aluminum 6063
 Pole Color Black / Silver
 IP&IK Protection IP65, IK08
 Operating Temp -25°C ~ +45°C
 Warranty 10 Years

LED LIGHT

LED Chips Philips
 Power Consumption Factory Set 2W (1-2W adjustable at site)
 Output 160LM/W
 Light Distribution T5
 Color 3000K / 4000K / 5000K
 Runtime STD-4 Step dimming

BATTERY

Capacity 3.7V 15Ah LiFePo4
 Cycles 3000

SOLAR MODULE

Watt Pmax 6W Monocrystalline
 Design life 25 Years

MOUNTING OPTIONS

Direct bury
 Base plate mount



SPECIFICATION

Model Number ST-CubeMini-B
 Height L: 190mm×W: 267mm×H: 665mm

MATERIALS

Pole Material Metal+PC+Glass
 Pole Color Black / Silver
 IP&IK Protection IP65, IK08
 Operating Temp -25°C ~ +45°C
 Warranty 10 Years

LED LIGHT

LED Chips Philips
 Power Consumption Factory Set 1.5W×2 (1-3W adjustable at site)
 Output 170LM/W
 Light Distribution T5
 Color 3000K / 4000K / 5000K
 Runtime STD-4 Step dimming

BATTERY

Capacity 3.7V 15Ah LiFePo4
 Cycles 3000


SOLAR MODULE

Watt Pmax 5W×2 Monocrystalline
 Design life 25 Years

MOUNTING OPTIONS

Direct bury
 Base plate mount

FACTORY SET SCHEDULE

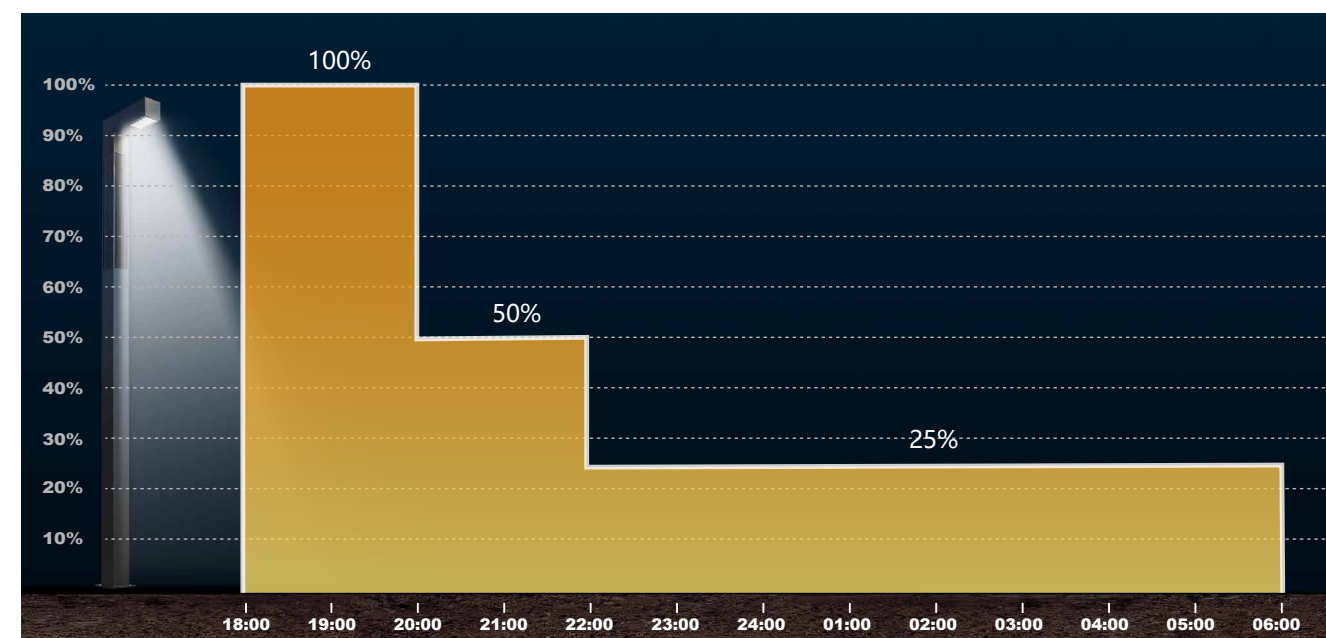



shinetoo®

Shinetoo Lighting USA LLC

Add:708-710 Armstrong Dr, Buffalo Grove, IL 60089
T: +1(224)567-8070 +1(224)567-8312 M:+1(847)899-1678
Email:Sales@stledlights.com

Jiaxing Shinetoo Lighting Co.,Ltd(China Factory)

Add:No.258, Xingchang Road, Xincheng Town, Xiuzhou District,
Jiaxing, Zhejiang, China 314015
Tel : +86-573-8350-0001 Fax : +86-573-8350-0005
Mobile : +86-138-0961-6725/+86-138-1878-3129
Email:Sales@stledlights.com