





LED Street Light



20W, 30W, 50W, 70W, 90W, 100W, 120W, 150W,
180W, 200W, 220W, 240W, 260W, 300W

DIMENSIONS



20W / 30W / 50W

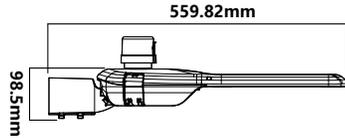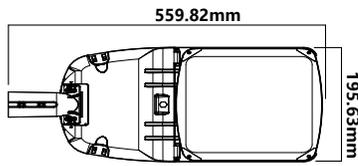



70W / 90W / 100W

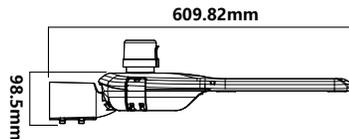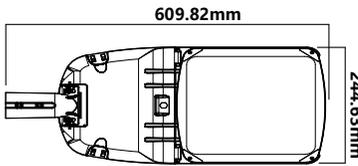



120W / 150W

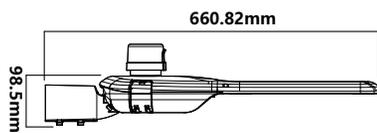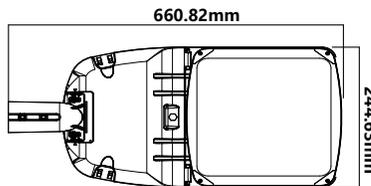

180W / 200W

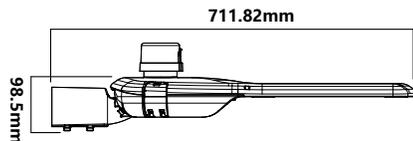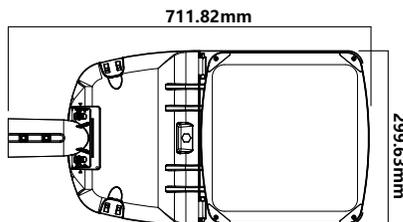


220W / 240W
260W / 300W

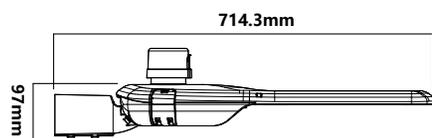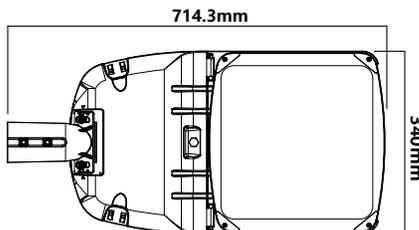

ITEM	MODEL NO.	RATED VOLTAGE	WATTAGE
1	ST-LSL20-XX-YY	100-277Vac	20W
2	ST-LSL30-XX-YY	100-277Vac	30W
3	ST-LSL50-XX-YY	100-277Vac	50W
4	ST-LSL70-XX-YY	100-277Vac	70W
5	ST-LSL90-XX-YY	100-277Vac	90W
6	ST-LSL100-XX-YY	100-277Vac	100W
7	ST-LSL120-XX-YY	100-277Vac	120W
8	ST-LSL150-XX-YY	100-277Vac	150W
9	ST-LSL180-XX-YY	100-277Vac	180W
10	ST-LSL200-XX-YY	100-277Vac	200W
11	ST-LSL220-XX-YY	100-277Vac	220W
12	ST-LSL240-XX-YY	100-277Vac	240W
13	ST-LSL260-XX-YY	100-277Vac	260W
14	ST-LSL300-XX-YY	100-277Vac	300W

Suffix "XX" denote LED Driver brand, inventronics/Philips
Suffix "YY" denote different CCT, can be 30=3000K,40=4000k, etc.

PHOTOMETRICS



OPTICAL SPECS

Max System Efficacy	130 Lm/W
CCT	30K / 40K /50K
CRI	>70Ra

ELECTRICAL SPECS

Input Voltage	100~277v AC
Power Frequency	50 / 60 Hz
Power Factor	>0.95
Dimming Function	DALI
SPD	10KV
Warrant	10Years

ELECTRICAL SPECS

Fixture Material	Glass Cover / PC(Lens) / Aluminum (Body)
Ingress Protection	IP66 Weatherproof
Lifespan	≥ 100,000 Hours
Operating Temperature	-40~122°F (-40~50°C)
Operating Humidity	10~90%RH

FIXTURE OPTIONS

Working with several lighting control