



LED STRIP FIXTURE


Applications

- Hospital
- School
- Offices
- Stores

Mounting

- Surface Mount
- Aircraft Cables

Photometrics

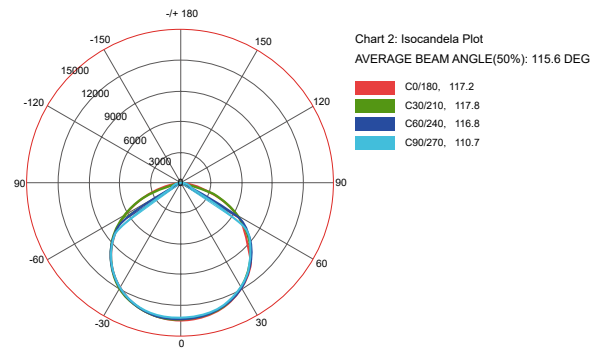

Benefits



- Available in 4' and 8'
- Designed as a direct replacement for fluorescent strips.
- Standard 0-10VDC dimming capability
- 7-Year Limited Product Warranty (Optional 10-Year Warranty available)

SPECIFICATIONS



Available Wattage	24W / 32W / 40W / 65W / 80W / 100W
Available CCT	4000K, 5000K
Efficacy Average	130 LM/W - 132 LM/W
Lumen Output	3,120 LM - 13,200 LM
Input Voltage	AC100-277V
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	>20%
Working Temp	-40F to 122F (-40C to 50C)
Lens	Frosted
IP Rating	IP20
Dimming	Yes
Life Span (Hours)	>70,000

DIMENSION

4FT

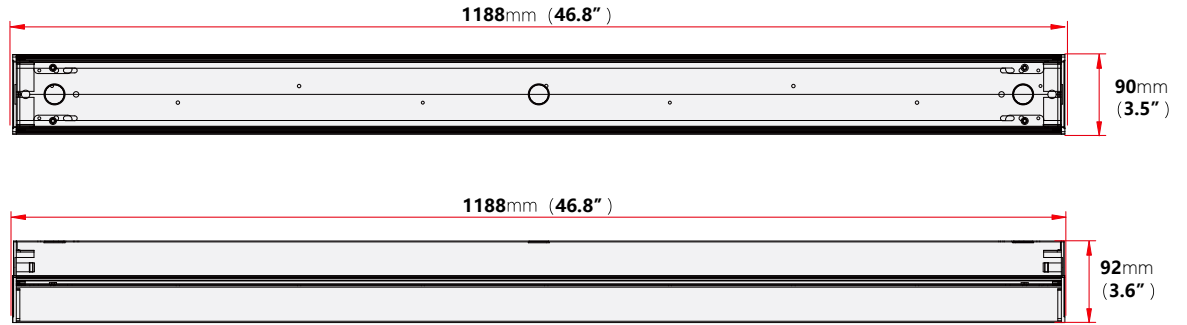

8FT

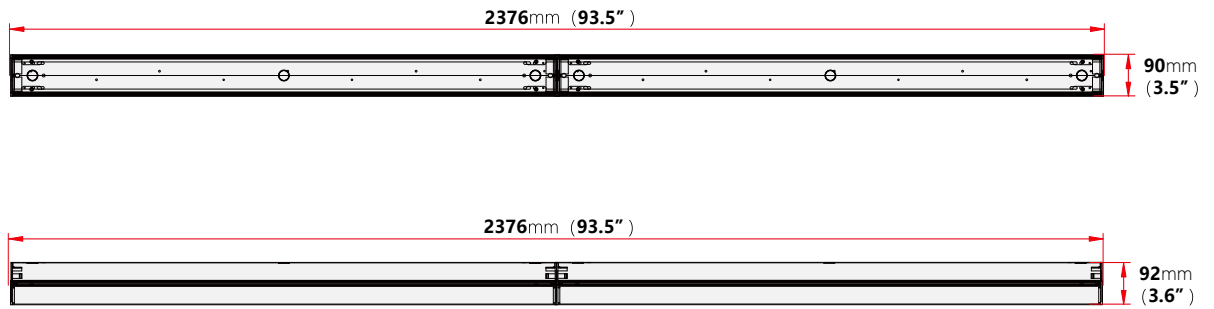

ORDERING INFORMATION

MODEL NUMBER	Size	Watts	CCT	LM / Watt	Total LM	Voltage
ST-LSF-4FT-24N-40K	4FT	24W	4000K	130LM/W	3.120LM	100-277V
ST-LSF-4FT-24N-50K	4FT	24W	5000K	132LM/W	3.168LM	100-277V
ST-LSF-4FT-32N-40K	4FT	32W	4000K	130LM/W	4.160LM	100-277V
ST-LSF-4FT-32N-50K	4FT	32W	5000K	132LM/W	4.224LM	100-277V
ST-LSF-4FT-40N-40K	4FT	40W	4000K	130LM/W	5.200LM	100-277V
ST-LSF-4FT-40N-50K	4FT	40W	5000K	132LM/W	5.280LM	100-277V
ST-LSF-4FT-40N-40K	8FT	40W	4000K	130LM/W	5.200LM	100-277V
ST-LSF-4FT-40N-50K	8FT	40W	5000K	132LM/W	5.280LM	100-277V
ST-LSF-4FT-65N-40K	8FT	65W	4000K	130LM/W	8.450LM	100-277V
ST-LSF-4FT-65N-50K	8FT	65W	5000K	132LM/W	8.580LM	100-277V
ST-LSF-4FT-80N-40K	8FT	80W	4000K	130LM/W	10.400LM	100-277V
ST-LSF-4FT-80N-50K	8FT	80W	5000K	132LM/W	10.560LM	100-277V
ST-LSF-4FT-100N-40K	8FT	100W	4000K	130LM/W	13.000LM	100-277V
ST-LSF-4FT-100N-50K	8FT	100W	5000K	132LM/W	13.200LM	100-277V